


LM337 (KA337) ADJUSTABLE VOLTAGE REGULATOR (NEGATIVE)

3-TERMINAL 1.5A NEGATIVE ADJUSTABLE REGULATOR

The LM337 is a 3-terminal negative adjustable regulator. It supply in excess of 1.5A over an output voltage range of -1.2V to -37V. This regulator requires only two external resistor to set the output voltage. Included on the chip are current limiting, thermal overload protection and safe area compensation.

FEATURES


- Output current in excess of 1.5A
- Output voltage adjustable between -1.2V and -37V
- Internal thermal-overload protection
- Internal short-circuit current limiting
- Output transistor safe-area compensation
- Floating operation for high-voltage applications
- Standard 3-pin TO-220 package

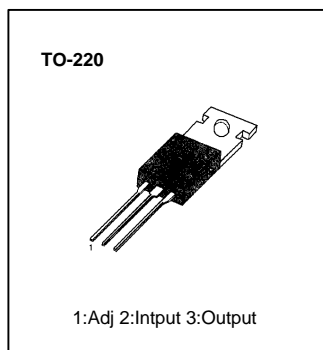

ORDERING INFORMATION

Device	Package	Operating Temperature
LM337T (KA337)	TO-220	0 ~ + 125°C

BLOCK DIAGRAM

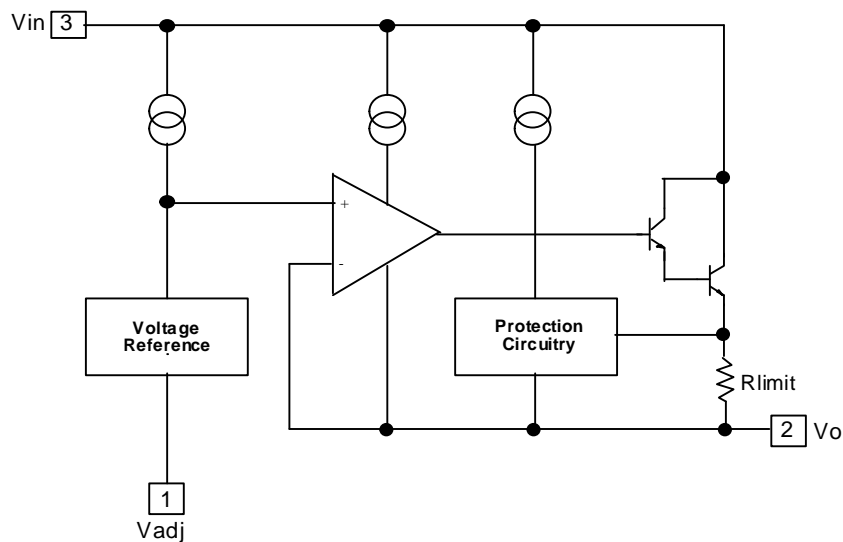

LM337 (KA337) ADJUSTABLE VOLTAGE REGULATOR (NEGATIVE)

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit
Input-Output Voltage Differential	$V_I - V_O$	40	V
Power Dissipation	P_D	Internally limited	W
Operating Temperature Range	T_{OPR}	0 ~ +125	°C
Storage Temperature Range	T_{STG}	-65 ~ +125	°C

ELECTRICAL CHARACTERISTICS

($V_I - V_O = 5V$, $I_O = 40mA$, $0^\circ C \leq T_J \leq +125^\circ C$, $P_{DMAX} = 20W$, unless otherwise specified)


Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Line Regulation	V_O	$T_A = +25^\circ C$ $-40V \leq V_O - V_I \leq -3V$		0.01	0.04	% / V
		$-40V \leq V_O - V_I \leq -3V$		0.02	0.07	
Load Regulation	V_O	$T_A = +25^\circ C$ $10mA \leq I_O \leq 0.5A$		15	50	mV
		$10mA \leq I_O \leq 1.5A$		15	150	
Adjustable Pin Current	I_{ADJ}			50	100	μA
Adjustable Pin Current	ΔI_{ADJ}	$T_A = +25^\circ C$ $10mA \leq I_O \leq 1.5A$ $-40V \leq V_O - V_I \leq -3V$		2	5	μA
Reference Voltage	V_{REF}	$T_A = +25^\circ C$	-1.213	-1.250	-1.287	V
		$-40V \leq V_O - V_I \leq -3V$ $10mA \leq I_O \leq 1.5A$	-1.200	-1.250	-1.300	
Temperature Stability	ST_T			0.6		%
Minimum Load Current to Maintain Rejection		$-40V \leq V_O - V_I \leq -3V$		2.5	10	mA
		$-10V \leq V_O - V_I \leq -3V$		1.5	6	
Output Noise	e_n	$T_A = +25^\circ C$, $10Hz \leq f \leq 10KHz$		$3 \times V_{OUT}$		$V/10^6$
Ripple Rejection Ratio		$V_O = -10V$, $f = 120Hz$		60		dB
		$C_{ADJ} = 10\mu F$	66	77		
Long Term Stability	ST	$T_J = 125^\circ C$, 1000Hours		0.3	1	%
Thermal Resistance Junction to Case	R_{EJC}			4		°C / W

* Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used

LM337 (KA337) ADJUSTABLE VOLTAGE REGULATOR (NEGATIVE)

TYPICAL APPLICATIONS

Fig. 1 Programmable Regulator

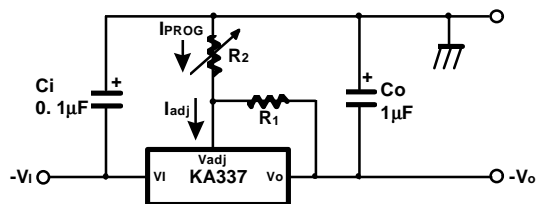

inches from power supply filter.

A 1.0µF solid tantalum or 10µF aluminum electrolytic is recommended.
Co is necessary for stability. A 1.0µF solid tantalum or 10µF aluminum electrolytic is recommended.

* Ci is required if regulator is located more than 4

$$V_o = -1.25V (1 + R_2 / R_1)$$

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE ^x ™	ISOPLANAR™	TinyLogic™
CoolFET™	MICROWIRE™	UHC™
CROSSVOLT™	POP™	VCX™
E ² CMOS™	PowerTrench®	
FACT™	QFET™	
FACT Quiet Series™	QS™	
FAST®	Quiet Series™	
FAST _r ™	SuperSOT™-3	
GTO™	SuperSOT™-6	
HiSeC™	SuperSOT™-8	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.
As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.